


CRI > 90	BOXY KR
3500 K	LED 10.4W / 1109lm / 500mA
3000 K	LED 10.4W / 1075lm / 500mA
2700 K	LED 10.4W / 1032lm / 500mA
REFL FL 33°	6 251 70 811 952 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
REFL FL 33°	6 251 70 811 932 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
REFL FL 33°	6 251 70 811 922 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
MAINS DIMMING (FE) 120V / 60Hz 1.3 IP20 DAMP REQUIREMENTS MUD KIT 2 COVERPLATE R 117 ACCESSORIES BOXY HONEYCOMB / LENS / GLASS	

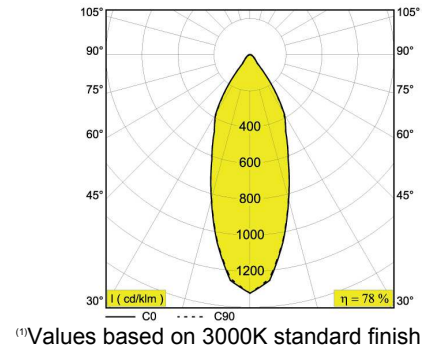

Application

Ceiling surface mounted
 Installation to a standard octagonal box 4" with optional coverplate installation,
 Mud Kit installation
 For indoor use only

Color Finish

B-B - Black-Black
 W-W - White-White
 B-MMAT - Black-Gold mat
 W-B - White-Black

Light Source

One 10,4W LED included

Delivered Lumens

808lm at 2700K⁽¹⁾
 841lm at 3000K⁽¹⁾
 868lm at 3500K⁽¹⁾

Power Supply

Electronic power supply included.
 120V input, 500mA current controlled
 Mains dimmable electronic power supplies included
 (100-10% dimmable)

Specification features

Surface treated aluminum housing
 Suitable for dry or damp locations
 Protected against solid objects greater than 12mm | 1/2" → IP20
 Weight: 1,3lbs 0,6kg

Dimensions

Height: 100mm = 3"-15/16
 Diameter: Ø90mm = 3"-9/16


PROJECT INFO


Date _____

Client _____

Project Name _____

Type/Quantity _____

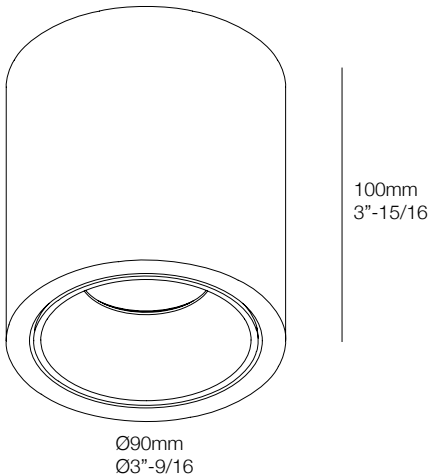




CRI > 90	BOXY KR OK
3500 K	LED 10.4W / 1109lm / 500mA
REFL FL 33°	6 251 77 811 952 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
3000 K	LED 10.4W / 1075lm / 500mA
REFL FL 33°	6 251 77 811 932 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
2700 K	LED 10.4W / 1032lm / 500mA
REFL FL 33°	6 251 77 811 922 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W

ADJUSTABLE 0° - 30° / 355°
 MAINS DIMMING (FE)
 120V / 60Hz

IP20 DAMP

REQUIREMENTS
 MUD KIT 2
 COVERPLATE R 117

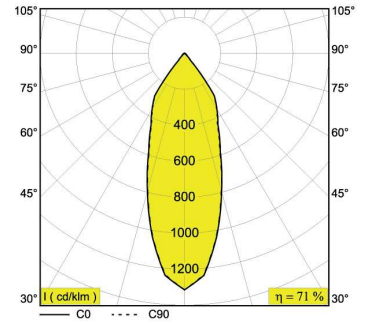

⁽¹⁾Values based on 3000K standard finish

Application

Ceiling surface mounted
 Installation to a standard octagonal box 4" with optional coverplate installation,
 Mud Kit installation
 For indoor use only

Color Finish

B-B - Black-Black
 W-W - White-White
 B-MMAT - Black-Gold mat
 W-B - White-Black

Light Source

One 10,4W LED included

Delivered Lumens

737lm at 2700K⁽¹⁾
 768lm at 3000K⁽¹⁾
 792lm at 3500K⁽¹⁾

Power Supply

Electronic power supply included.
 120V input, 500mA current controlled
 Mains dimmable electronic power supply included
 (100-10% dimmable)

Specification features

Surface treated aluminum housing
 Suitable for dry or damp locations
 Protected against solid objects greater than 12mm | 1/2" → IP20
 Weight: 2lbs 0,9kg

Dimensions

Height: 120mm = 4"-3/4
 Diameter: Ø98mm = 3"-7/8

PROJECT INFO

Date _____

Client _____

Project Name _____

Type/Quantity _____

