


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

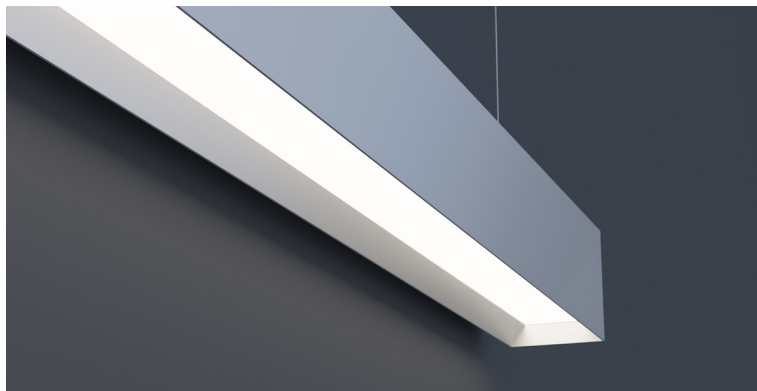

Linear, architectural luminaire with beveled aluminum extrusion. Ideal for indoor applications where an LED luminaire with continuous light is required. Suspended, surface or wall mount installation.

FEATURES

- Available In Custom Lengths & Long Runs To 1/16" Accuracy
- Damp Location Rated
- CRI 90+ Standard
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Enlighted/Wattstopper Sensors Available

APPLICATIONS	Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors
---------------------	--


CONSTRUCTION	Extruded Aluminum Housing With Beveled Edge. Die-Cast Ends.	OPTICS	Extruded Satin Acrylic Lens
---------------------	---	---------------	-----------------------------

WARRANTY	5 Year Limited Warranty (Covers Standard Components)	FINISH	Standard Powder-Coated White. Custom RAL Colors Available
-----------------	--	---------------	---

FIXTURE RATINGS & CERTIFICATIONS	Union Made ETL Listed	Made In The USA Damp Location Rated	 
---	--------------------------	--	--

ELECTRICAL	Integral Driver With 0-10V 10% Dimming Standard. Several Driver Options Available. See Below For Lutron Dimming Information
-------------------	---

EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	7.25 W/ft	605 Lm/ft	79 Lm/W
Low (LTG2)	5 W/ft	400 Lm/ft	80 Lm/W
High (LTG3)	10 W/ft	820 Lm/ft	82 Lm/W

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

ORDERING	1	2	3	4	5	6	7	8	9	10	11
-----------------	---	---	---	---	---	---	---	---	---	----	----


1 - FIXTURE ID	2 - LENGTH	3 - COLOR TEMP	4 - LED SYSTEM	5 - VOLTAGE	6 - DRIVER (Remote)
KAY6 LED	2 - 2 ft 4 - 4 ft 8 - 8 ft x'-x" - Custom (specify length) **Patterns available consult factory	27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K *Must use DMX Driver (Remote)	LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	UNV - Universal (120/277V)	DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming L3DA - Lutron 3-wire 1% Dimming LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming DMX - For Color Tuning and RGBW

7 - FINISH	8 - MOUNTING	9 - OPTICS	10 - CONTROL (Optional)	11 - CIRCUIT (Optional)
W - White (Standard) CC - Custom Color (provide RAL#)	AC - Aircraft Cable (50") SM - Surface Mount WM - Wall Mount	SD - Standard Diffuser	EIS - Integral Sensor by Enlighted WIS - Integral Sensor by Wattstopper	EM 120V - Emergency Pack EM 277V - Emergency Pack


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

CORNERS & PATTERNS


Available with illuminated corners, angles, and custom patterns. **Must consult factory for custom corners, patterns and elevations.**




Square Patterns




X Patterns




T Patterns



Custom Angles




Custom Patterns




Custom Elevations

LENS CUT OPTIONS



Straight-cut



Mitered Angle