


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_

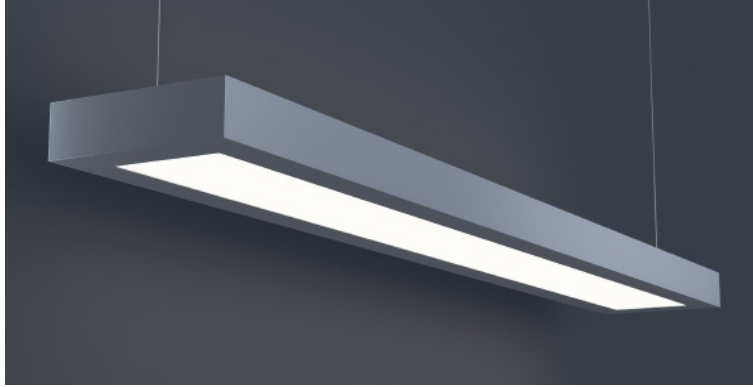

Linear, architectural luminaire with direct and indirect lighting. For use in indoor applications where a pendant LED luminaire is required. Air craft cable mounted. Available in custom colors and light outputs.

### FEATURES

- 25% Direct And 75% Indirect Light Distribution
- Continuous Row Mounting
- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K & 4000K Color Temperatures Available
- Enlighted/Wattstopper Sensors Available

**APPLICATIONS** Offices, Retail Stores, Classrooms, Reception Areas & Corridors

**CONSTRUCTION** Durable Cold Rolled 20 Gauge Steel | **OPTICS** Acrylic Diffuse Lens

**WARRANTY** 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available


**FIXTURE RATINGS & CERTIFICATIONS** Union Made ETL Listed Made In The USA Damp Location Rated



**ELECTRICAL** Integral Driver With 0-10V 10% Dimming Standard. Several Driver Options Available. See Below For Lutron Dimming Information

2-Wire Forward Phase; Hi-Lume 1% Dimming, Only Available For 120V .....	LTEA
3-Wire EcoSystem; Hi-lume 1% Dimming .....	L3DA
Digital EcoSystem; Hi-lume 1% Dimming, 'Soft-on Fade-to-black' (Required for Daylighting) .....	LDE1
5 Series EcoSystem; 5% Dimming .....	LDE5

### EXTRUSION DIMENSIONS

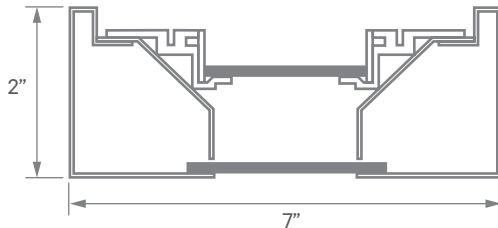

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	11.5 W/ft	1,150Lm/ft	100 Lm/W
Low (LTG2)	10 W/ft	1,025 Lm/ft	101 Lm/W
High (LTG3)	13 W/ft	1,290 Lm/ft	99 Lm/W

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

**ORDERING** 1 2 3 4 5 6 7 8 9 10 11

<p><b>1 - FIXTURE ID</b> KCLO LED</p>	<p><b>2 - LENGTH</b> 4 - 4 ft 8 - 8 ft</p>	<p><b>3 - COLOR TEMP</b> 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K  *Must use DMX Driver (Remote)</p>	<p><b>4 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)</p>	<p><b>5 - VOLTAGE</b> UNV - Universal (120/277V)</p>	<p><b>6 - DRIVER</b> DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) LTEA* - Lutron 2-wire 1% Dimming L3DA* - Lutron 3-wire 1% Dimming LDE1* - Lutron Digital EcoSystem LDE5* - 5 Series EcoSystem; 5% Dimming *Refer to 'Electrical' Information Above DMX - For Color Tuning and RGBW</p>
<p><b>7 - FINISH</b> W - White (Standard) CC - Custom Color (provide RAL#)</p>	<p><b>8 - MOUNTING</b> AC - Air Craft Cable (50") WB - Wall Bracket</p>	<p><b>9 - CONTROL</b> EIS - Integral Sensor by Enlighted WIS - Integral Sensor by Wattstopper</p>	<p><b>10 - OPTICS</b> SD - Standard Diffuser</p>	<p><b>11 - OPTIONS</b> EM 120V - Emergency Pack EM 277V - Emergency Pack</p>	