

# KEZPAN 2X2 30YN



2' x 2' EZPAN edgelit LED panel lights provide smooth and uniform light edge-to-edge for a clean, modern look. Install in drop ceilings or use optional surface, pendant or recessed (dry wall) mounting kits.

Color: White

Weight: 13.2 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

#### Driver Info

Type	Constant Current
120V	0.25A
208V	0.015A
240V	0.13A
277V	0.11A
Input Watts	29.9W

#### LED Info

Watts	30W
Color Temp	3500K (Warm Neutral)
Color Accuracy	82 CRI
L70 Lifespan	60,000
Lumens	3,434
Efficacy	114.8 LPW

## Technical Specifications

### Listings

#### UL Listing:

Suitable for damp locations

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.  
DLC Product Code: P9AWC2E4

#### Note:

All values are typical (tolerance +/- 10%)

#### Lifespan:

60,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### LEDs:

Long-life, High efficiency, micro-power, surface mount LEDs

### Electrical

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

#### Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.11A

#### THD:

11.8% at 120V, 7.5% at 277V

#### Power Factor:

98.9% at 120V, 97.7% at 277V

#### Construction

#### IC Rating:

Suitable for insulated ceilings

#### Maximum Ambient Temperature:

Suitable for use in -30°C (-22°F) to 50°C(122°F)

#### Lens:

Frosted polystyrene

#### Mounting:

Recessed ceiling

#### Housing:

Lightweight aluminum housing, steel pan and junction box

#### Installation:

Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation

#### Finish:


Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

# KEZPAN 2X2 30YN

## Dimensions

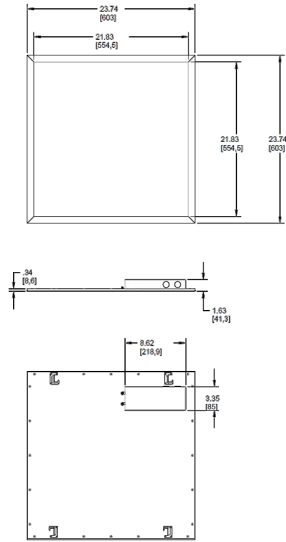

## Features

- Perfect for shallow plenums
- Even and diffuse ambient illumination, ideal for spaces where glare-free lighting is required
- 0-10V dimmable driver, standard

## Ordering Matrix

Family	Size	Wattage	Color Temp	Driver	Options
KEZPAN	2X2	—	30	YN	/D10
	2X4 = 2' x 4'	30 = 30W	Blank = 5000K (Cool)	/D10 = 0-10V Dimming	Blank = No Option
	2X2 = 2' x 2'	40 = 40W	N = 4000K (Neutral)		/LC = Lightcloud Controller
		50 = 50W	YN = 3500K (Warm Neutral)		/E2 = Emergency Battery Backup
			Y = 3000K (Warm)		/LC/E2 = Lightcloud Controller w/ Emergency Battery Backup