

KEZPAN 2X4 30YN



2' x 4' EZPAN edgelit LED panel lights provide smooth and uniform light edge-to-edge for a clean, modern look. Install in drop ceilings or use optional surface, pendant or recessed (dry wall) mounting kits.

Color: White

Weight: 13.4 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.25A
208V	0.15A
240V	0.13A
277V	0.11A
Input Watts	29.2W
Efficiency	N/A

LED Info

Watts	30W
Color Temp	3500K (Warm Neutral)
Color	82 CRI
Accuracy	
L70 Lifespan	60,000
Lumens	3,469
Efficacy	118.8 LPW

Technical Specifications

Listings

UL Listing:

Suitable for damp locations

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: PFVTCQJ0

LED Characteristics

Note:

All values are typical (tolerance +/- 10%)

Lifespan:

60,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

LEDs:

Long-life, High efficiency, micro-power, surface mount LEDs

Construction

Maximum Ambient Temperature:

Suitable for use in -30°C (-22°F) to 50°C(122°F)

IC Rating:

Suitable for insulated ceilings

Lens:

Frosted polystyrene

Mounting:

Recessed ceiling

Housing:

Lightweight aluminum housing, steel pan and junction box

Installation:

Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Electrical

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.11A

THD:


8.8% at 120V, 7.7% at 277V

Power Factor:

99.2% at 120V, 97.2% at 277V

KEZPAN 2X4 30YN

Dimensions

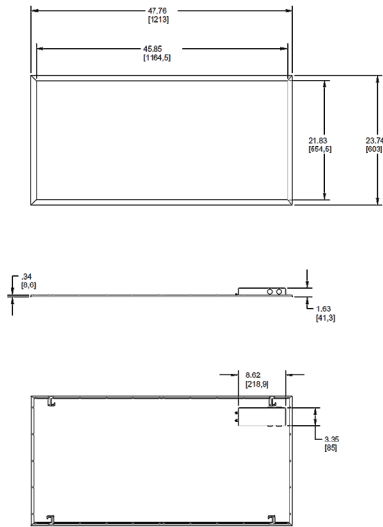

Features

- Perfect for shallow plenums
- Even and diffuse ambient illumination, ideal for spaces where glare-free lighting is required
- 0-10V dimmable driver, standard

Ordering Matrix

Family	Size	Wattage	Color Temp	Driver	Options
KEZPAN	2X4	30	YN	/D10	^
	2X4 = 2' x 4'	30 = 30W	Blank = 5000K (Cool)	/D10 = 0-10V Dimming	Blank = No Option
	2X2 = 2' x 2'	40 = 40W	N = 4000K (Neutral)		/LC = Lightcloud Controller
		50 = 50W	YN = 3500K (Warm Neutral)		/E2 = Emergency Battery Backup
			Y = 3000K (Warm)		/LC/E2 = Lightcloud Controller w/ Emergency Battery Backup