


DATE	PROJECT	FIRM	TYPE
------	---------	------	------




Round, 'halo'-style luminaire with 4 ft diameter. For use in indoor applications where an LED luminaire is required; great for lobbies, reception areas and corridors. Mounted with air craft cable.

FEATURES

- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, & 4000K Color Temperatures Available

APPLICATIONS	Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors		
CONSTRUCTION	Extruded Rolled Aluminum. Ring is 2-3/4" in Width.	OPTICS	Laser-cut Cast High Transmission Satin Acrylic Lens with No LED imaging
WARRANTY	5 Year Limited Warranty (Covers Standard Components)	FINISH	Standard Powder-Coated White. Custom RAL Colors Available
FIXTURE RATINGS & CERTIFICATIONS	Union Made ETL Listed	Made In The USA Damp Location Rated	
ELECTRICAL	Remote Driver With 0-10V 10% Dimming Standard and 0-10V 1% Dimming Optional.		

EXTRUSION DIMENSIONS

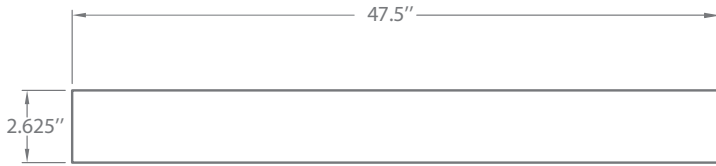

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	62 W	3,285 Lm
Low (LTG2)	40 W	2,320 Lm
High (LTG3)	100 W	4,800 Lm

Based on a 3000K, 90CRI luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

ORDERING



1 - FIXTURE ID KING LED	2 - LENGTH 4 - 4 ft	3 - COLOR TEMP 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm)	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V)
7 - FINISH W - Standard White CC - Custom Color (provide RAL#)	8 - MOUNTING AC - Air Craft Cable (48")	9 - OPTIONS EM 120V - Emergency Pack EM 277V - Emergency Pack			