


KUSH LED UP

DATE PROJECT FIRM TYPE

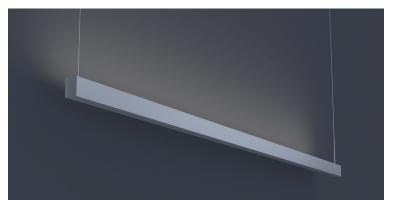

Architectural luminaire with extremely low profile. LED luminaire that provides continuous uplight regardless of length. Custom outputs and colors available.


FEATURES

- Available In Custom Lengths & Long Runs To 1/16" Accuracy
- Corners & Patterns Available (See Page 2)
- 100% Uplight
- Damp Location Rated
- CRI 90+ Standard
- 3000K & 3500K Color Temperatures Available

APPLICATIONS	Offices, Reception Areas & Corridors						
CONSTRUCTION	Extruded Alumi End Caps	inum Housing With Die Cast Aluminum		OPTICS	Acrylic Diffuse Lens		
WARRANTY	5 Year Limited Warranty (Covers Standard Components)			FINISH	Standard Powder-Coated White. Custom RAL Colors Available		
FIXTURE RATINGS & CERTIFICATIONS	Union Made ETL Listed	Made In The USA Damp Location Rated		c	is		

ELECTRICAL 0-10V Remote Driver with 19% Dimming

EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	5.25 W/ft	445 Lm/ft
Low (LTG2)	3.5 W/ft	300 Lm/ft
High (LTG3)	7.25 W/ft	585 Lm/ft

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

ORDERING	1	2	3	4	5	6	7	8	9	
- FIXTURE ID		2 - LENGTH	3 - COL	OR TEMP	4 - LEI	D SYSTEM	5 - VOLTAC	ÈΕ	6 - DRIVER (R	Remote)
(USH LED UP		4 - 4 ft 8 - 8 ft x'-x" - Custom (specify length) **Patterns available consult factory	30 - 300 35 - 350	0K/90 CRI 00K/90 CRI 00K/90 CRI 00K/90 CRI	LTG2 - LTG3 - C - Cu		UNV - Univ (120,	ersal (277V)	DB1% - 1% Dim LTEA - Lutron L3DA - Lutron	2-wire 1% Dimming 3-wire 1% Dimming Digital EcoSystem

7 - FINISH

W - White (Standard)
CC - Custom Color
(provide RAL#)

8 - MOUNTING

AC - Aircraft Cable (50")

9 - CIRCUIT (Optional)

EM 120V - Emergency Pack EM 277V - Emergency Pack

December 2018




KUSH LED UP


DATE PROJECT FIRM TYPE

CORNERS & PATTERNS

Available with illuminated corners, angles, and custom patterns. Must consult factory for custom corners and patterns.

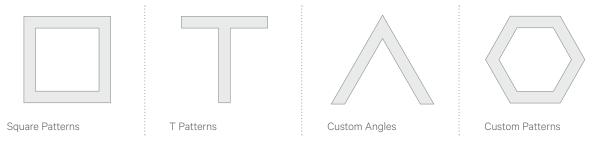

LENS CUT OPTIONS




NOTE: Straight-Cut is standard configuration, Mitered Angle is optional and must be specified.

December 2018




PHOTOMETRICS



KUSH LED UP 4FT LTG1 3500K DELIVERED LUMENS: 1,789Lm TOTAL WATTS: 21W

ZONAL LUMEN SUMMARY


Z	10	١E	LUMENS	% LAMP % F	IXTURE
0.00	-	30.00	0.00	0.00	0.00
0.00	-	40.00	0.00	0.00	0.00
0.00	-	60.00	0.00	0.00	0.00
0.00	-	90.00	0.30	0.01	0.02
90.00	-	120.00	294.47	9.32	16.45
90.00	-	150.00	1232.17	39.00	68.84
90.00	-	180.00	1789.67	56.64	99.98
0.00	_	180.00	1789.98	56.65	100.00



KUSH LED UP 4FT LTG2 3500K DELIVERED LUMENS: 1,200Lm TOTAL WATTS: 14W

ZONAL LUMEN SUMMARY

ZOI	NE	LUMENS	% LAMP	% FIXTURE
0.00 -	30.00	0.00	0.00	0.00
0.00 -	40.00	0.00	0.00	0.00
0.00 -	60.00	0.00	0.00	0.00
0.00 -	90.00	0.20	0.01	0.02
90.00 -	120.00	197.73	9.33	16.47
90.00 -	150.00	826.78	39.03	68.87
90.00 -	180.00	1200.37	56.67	99.98
0.00 -	180.00	1200.58	56.68	100.00



KUSH LED UP 4FT LTG3 3500K DELIVERED LUMENS: 2,343Lm TOTAL WATTS: 29W

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	0.00	0.00	0.00
0.00 - 40.00	0.00	0.00	0.00
0.00 - 60.00	0.00	0.00	0.00
0.00 - 90.00	0.40	0.01	0.02
90.00 - 120.00	385.24	9.31	16.44
90.00 - 150.00	1613.43	38.99	68.83
90.00 - 180.00	2343.58	56.63	99.98
0.00 - 180.00	2343.99	56.64	100.00

December 2018