


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

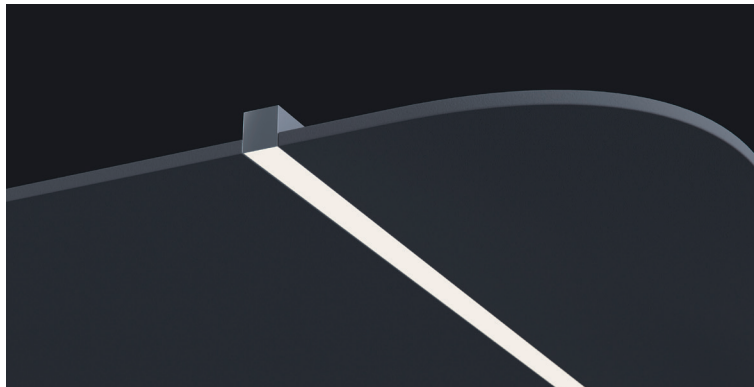

Recessed, architectural luminaire with extremely low profile. LED luminaire that provides continuous light regardless of length. Custom outputs, colors and patterns available.

FEATURES

- Glare-free lighting
- Available in custom patterns
- Damp Location Rated
- 3000k and 3500k color temperatures available

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Extruded Aluminum Housing With Die Cast Aluminum End Caps | **OPTICS** Acrylic Diffuse Lens


WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated



ELECTRICAL 0-10V Remote Driver with 10% Dimming Standard. Several Driver Options Available.

EXTRUSION DIMENSIONS

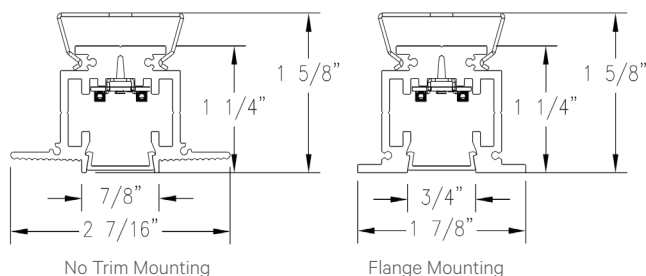

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	3.75 W/ft	465 Lm/ft
Low (LTG2)	2.25 W/ft	285 Lm/ft
High (LTG3)	5.75 W/ft	530 Lm/ft

Please Note: For custom LED package requests consult factory; wattages vary based on specified output. Additional photometric information available.

ORDERING	1	2	3	4	5	6	7	8	9
-----------------	---	---	---	---	---	---	---	---	---


1 - FIXTURE ID KUSH LED REC	2 - LENGTH 4 - 4 ft 8 - 8 ft x'-x" - Custom (specify length) **Patterns available consult factory	3 - COLOR TEMP 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER (Remote) DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming L3DA - Lutron 3-wire 1% Dimming LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming DMX - DMX Control
---------------------------------------	--	---	---	--	--

7 - FINISH W - White (Standard) BLK - Black CC - Custom Color (provide RAL#)	8 - MOUNTING F - Flange NT - No Trim, Spackle Flange	9 - CIRCUIT (Optional) EM 120V - Emergency Pack
--	---	---


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

CORNERS & PATTERNS


Available with illuminated corners, angles, and custom patterns. **Must consult factory for custom corners and patterns.**




Square Patterns



T Patterns



Custom Angles



Custom Patterns